


FITTING INSTRUCTIONS FOR LP0108 LICENCE PLATE BRACKET KTM 125 DUKE 2011-



THIS KIT CONTAINS THE ITEMS PICTURED AND LABELLED BELOW. DO NOT PROCEED UNTIL YOU ARE SURE ALL PARTS ARE PRESENT.

Please note that the way the kit is packed does not necessarily represent the way of mounting to the bike

THE PARTS SHOWN MAY BE REPRESENTATIVE ONLY (FOR CLARITY OF INSTRUCTIONS ONLY)

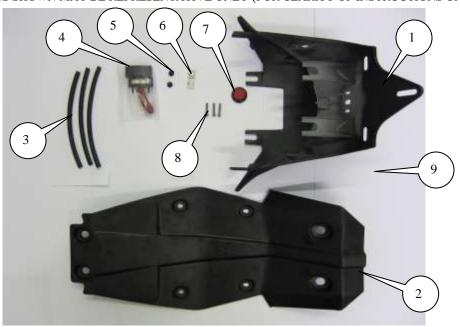



LEGEND

 $\overline{\text{ITEM 1}} = \overline{\text{LICENCE PLATE BRACKET (TB0108 PT 1) (x1)}}$.

ITEM 2 = UNDER-TRAY (TB0108 PT 2) (x1).

ITEM 3 = 150mm LENGTH OF HEAT SHRINK (x3).

ITEM 4 = LICENCE PLATE ILLUMINATOR TO INCLUDE CONNECTORS AND SHROUD (LA0002)

(x1).

ITEM 5 = RUBBER GROMMET (RB50-20-00FG) (x2).

ITEM 6 = CABLE CLIPS (x2).

ITEM 7 = REFLECTOR(x1).

ITEM 8 = M4x20mm LONG BUTTON HEAD BOLTS (x3).

ITEM 9 = M6x16mm LONG BUTTON HEAD BOLTS (x2).


ITEM 10 = M6 WASHERS (x2).

ITEM 11 = M10 WASHERS (x2).

Please note that in cases where kits are packed with rubber washers holding the components onto the bolt – *the rubber washers should be thrown away*!

TOOLS REQUIRED

- Socket set to include 10mm A/F socket and wrench.
 - 2.5mm and 4mm Allen keys.
 - 14mm spanner.
 - Phillips screw-driver.
 - Electrical pliers/crimps.
 - Super glue.

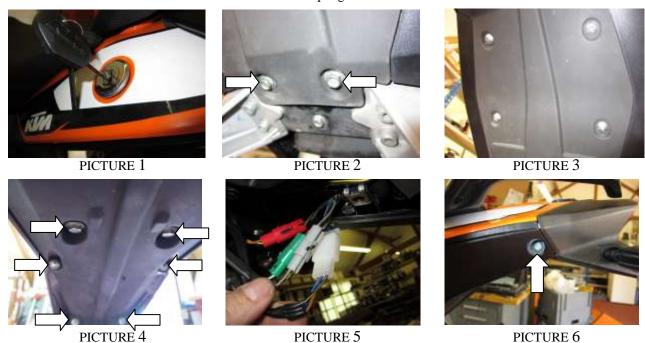

R&G Racing





PICTURE 7



PICTURE 8



PICTURE 9



PICTURE 10



PICTURE 11



PICTURE 12



PICTURE 13

FITTING INSTRUCTIONS

- REMOVE PILLION SEAT USING KEY (SEE PICTURE 1).
- UNDO AND REMOVE THE EIGHT BOLTS AND FOUR SCREWS/WASHERS HOLDING THE ORIGINAL UNDER-TRAY IN PLACE AS SHOWN IN PICTURES 2, 3 AND 4.
- REMOVE THE ORIGINAL UNDER-TRAY.
- DISCONNECT THE ELECTRICAL PLUG SOCKETS FOR LICENCE PLATE ILLUMINATOR, INDICATORS AND REAR LIGHT (AS SHOWN IN PICTURE 5).



- REMOVE THE FOUR BOLTS HOLDING THE REAR LIGHT SURROUND SHOWN IN PICTURES 6, 7 AND 8.
- REMOVE THE REAR LIGHT AND REAR LIGHT SURROUND.
- UNDO AND REMOVE THE THREE BOLTS HOLDING THE REAR LIGHT IN POSITION AND REMOVE THE REAR LIGHT.
- FIT NEW LICENCE PLATE ILLUMINATOR TO NEW LICENCE PLATE BRACKET (SEE PICTURE 12). WE SUGGEST CUTTING AND REUSING ORIGINAL PLUG SOCKET (AS SHOWN IN PICTURE 5). PROTECT THE WIRES USING THE SMALLER HEAT SHRINK FROM KIT.

THE ORIGINAL BROWN WIRE -----NEW RED WIRE.
THE ORIGINAL BLACK/YELLOW WIRE (EARTH) -----NEW BLACK WIRE.

- PLEASE NOTE YOU WILL NEED TO GLUE THE LIGHT SHROUD TO THE LED LICENCE PLATE ILLUMINATOR BEFORE FITTING USING SUPER GLUE (SEE TOP PICTURE).
- REMOVE THE TWO CLIP NUTS AS SHOWN IN PICTURE 11 AND PLACE ON THE CORRESPONDING POSITIONS ON THE NEW LICENCE PLATE BRACKET.
- FIT INDICATORS (TURN SIGNALS) OF YOUR CHOICE TO NEW LICENCE PLATE BRACKET. IF FITTING MINI'S, R&G PRODUCT CODE RG370 (IF USING THESE NO RESISTORS ARE REQUIRED) THERE ARE GOMMETS SUPPLIED TO BLANK OFF UNUSED HOLE IN LICENCE PLATE BRACKET.
 - PLEASE NOTE: GREY PLUG SOCKET=RIGHT HAND INDICATOR (TURN SIGNAL).

 : GREEN PLUG SOCKET=LEFT HAND INDICATOR (TURN SIGNAL).
- FIT THE REAR LIGHT TO THE NEW LICENCE PLATE BRACKET USING THE THREE M4 BOLTS FROM KIT AND THREE OF THE WASHERS REMOVED FROM THE UNDER-TRAY SECURING BOLTS.
- OFFER THE NEW LICENCE PLATE BRACKET INTO POSITION AND SECURE AS ORIGINAL USING THE FOUR ORIGINAL BOLTS (FEED THE WIRING THROUGH THE HOLE IN THE REAR SUB-FRAME AS ORIGINAL).
- RECCONNECT ALL WIRING PLUG SOCKETS AS ORIGINAL (IT IS A GOOD IDEA TO CHECK THE OPERATION OF ALL LIGHTS AT THIS STAGE).
- OFFER THE NEW UNDER-TRAY INTO POSITION AND SECURE USING THE ORIGINAL BOLTS EXCEPT THE TWO MOST FORWARD/LOWEST MOUNTING HOLES (AS SHOWN IN PICTURE 2). ON THESE HOLES PLACE ONE OF THE M10 WASHERS OVER EACH LOCATING SPIGOT, THEN USE THE TWO M6x16mm LONG BUTTON HEAD BOLTS AND WASHERS FROM KIT TO SECURE.
- REFIT LICENCE PLATE (IT MAY REQUIRE DRILLING).
- IMPORTANT: IF FITTING A FULL-SIZE LICENCE PLATE AND PLACING IT FAR DOWN ON THE LICENCE PLATE HANGER, THERE IS A SMALL CHANCE OF THE LICENCE PLATE HITTING THE BACK WHEEL UNDER HEAVY LOAD AND OVER LARGE BUMPS IN THE ROAD. IT IS YOUR RESPONSIBILITY TO CHECK FOR THIS POSSIBILITY AND TAKE AVOIDING ACTION. FAILURE TO CHECK THIS COULD RESULT IN SERIOUS INJURY.
- REFIT SEAT.
- DEPENDING ON LOCAL LAWS, ATTACH ENCLOSED REFLECTOR IN AN APPROPIATE LOCATION.
- TEST THE LICENCE PLATE ILLUMINATOR AND ALL LIGHTS BEFORE RIDING.



Issue 2 28/09/2011 (NSY)

CONSUMER NOTICE

The catalogue description and any exhibition of samples are only broad indications of the Products and R&G may make design changes which do not diminish their performance or visual appeal and supplying them in such state shall conform to the order. The Buyer acknowledges no representation or warranty (other than as to title) has been given or will apply to the Products other than those in R&G's order or confirmation and the Buyer confirms it has chosen the Products as being of merchantable quality and suitable for its particular purposes. Where R&G fits the Products or undertakes other services it shall exercise reasonable skill and care and rectify any fault free of charge unless the workmanship has been disturbed. The Buyer is responsible for ensuring that the warranty on the motorcycle is not affected by the fitting of the Products. On return of any defective Products R&G shall at its option either supply a replacement or refund the purchase money but shall not be liable if the Products have been modified or used or maintained otherwise than in accordance with R&G's or manufacturer's instructions and good engineering practice or if the defect arises from accident or neglect. Other than identified above and subject to R&G not limiting its liability for causing death and personal injury, it shall not be liable for indirect or consequential loss and otherwise its liability shall be limited to the amounts paid by the Buyer for the Products or the fitting or service concerned. These terms do not affect the Buyer's statutory rights.

R&G RACING RETURNS POLICY (NON-FAULTY GOODS)

Returns must be pre-authorised (if not pre-authorised the return will be rejected). Goods may only be returned direct to us if they were purchased direct from us (customer must prove if necessary). Otherwise to be returned to original vendor. Goods must be in resellable condition, in the opinion of R&G Racing. All returns are subject to a 25% restocking and handling fee (25% of the gross value exc. P&P – at the prevailing price at time of purchase). The customer must pay any and all carriage charges. No returns of discontinued products, unless within 14 days of purchase. This policy does not affect your statutory rights and does not refer to faulty goods.