


### FITTING INSTRUCTIONS FOR DG0052PROBK

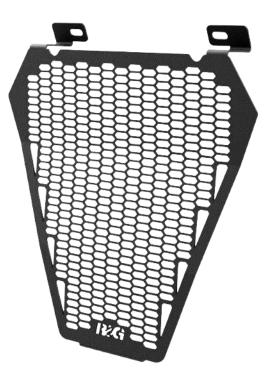

#### THIS KIT CONTAINS THE ITEMS PICTURED AND LABELLED OVER PAGE.

SOME PARTS MAY BE SHOWN FOR CLARITY OF INSTRUCTIONS ONLY.

DO NOT PROCEED UNTIL YOU ARE SURE ALL PARTS ARE PRESENT.

#### **PLEASE READ ALL INSTRUCTIONS BEFORE PROCEEDING.**

### IF IN ANY DOUBT WHEN FITTING OUR PRODUCTS, CONSULT ONE OF OUR DEALERS OR HAVE FITTED BY A QUALIFIED TECHNICIAN.

PLEASE NOTE THAT THE WAY THE KIT IS PACKED DOES NOT NECESSARILY REPRESENT THE WAY OF MOUNTING TO THE BIKE.

IN THE EVENT OF RUBBER WASHERS BEING USED TO HOLD COMPONENTS ONTO BOLTS,

THESE RUBBER WASHERS CAN BE THROWN AWAY.

### **DIGITAL COPIES OF THESE INSTRUCTIONS ARE AVAILABLE FROM:**

WWW.RG-RACING.COM

R&G Racing Unit 1, Shelley's Lane, East Worldham, Alton, Hampshire, GU34 3AQ Tel: +44 (0)1420 89007 Fax: +44 (0)1420 87301 <u>www.rg-racing.com</u> Email: <u>info@rg-racing.com</u>



### **TOOLS REQUIRED**

- SET OF ALLEN KEYS
- SET OF METRIC SPANNERS
- SMALL HEX BIT RATCHET WITH

PHILIPS BIT ATTACHMENT

**GENERAL TORQUE SETTINGS** 

- M4 BOLT = 8Nm M5 BOLT = 12Nm M6 BOLT = 15Nm M8 BOLT = 20Nm
- M10 BOLT = 40Nm
- M12 BOLT = 40Nm

### **LEGEND**

ITEM NO.	DESCRIPTION	QTY
ITEM 1	DG0052PRO (DOWNPIPE GRILLE COMPONENT)	1
ITEM 2	M6 x 35mm BUTTON HEAD BOLT	2
ITEM 3	M6 NYLOC NUT	2
ITEM 4	M6 x 12mm OD WASHER	2

## **FITTING DIAGRAM**




R&G Racing Unit 1, Shelley's Lane, East Worldham, Alton, Hampshire, GU34 3AQ Tel: +44 (0)1420 89007 Fax: +44 (0)1420 87301 <u>www.rg-racing.com</u> Email: <u>info@rg-racing.com</u>



DG0052PROBK

**FITTING PICTURES** 



Picture 1



Picture 2

## FITTING INSTRUCTIONS

### DISASSEMBLY:

- Remove the 2 bolts on the underside of the belly pan/farings.
- Remove the 2 nuts on the underside of the radiator.
- Remove the OEM plastic guard (black plastic between the two side fairings at the bottom).
- Leave the OEM lower bracket in place.

### FITTING DG0052PROBK:

**Please note:** other fairing bolts may be removed or loosened to make fitment easier.

- Manouver the grille into position between the two fairings, and thread the two studs below the underside of the radiator through the two top mounts of the grille. **Picture 1**
- Loosely thread on the supplied M6 nuts to allow the grille to move slightly.
- Allign the lower mounting bolts with the holes in the fairings and OEM bracket
- Then push through the supplied M6 bolts with the supplied washers already in place.
  Picture 2
- Ensure the lower mounts of the grille are in position over the threaded portion of the bolts then apply the nyloc nuts and tighten fully.
- Fully tighten the two top mounts using a ¼" 10mm socket, gaining access via the cut outs at the top of the grille.
- Re-tighten any other fairing screws you may have loosened during the process.

# **See more R&G products for your Motorcycle in the link below:**

R&G Racing | All Products for KTM - RC 200 (2022) (rg-racing.com)

ISSUE 1 02/03/2023 TB

#### CONSUMER NOTICE

The catalogue description and any exhibition of samples are only broad indications of the Products and R&G may make design changes which do not diminish their performance or visual appeal and supplying them in such state shall conform to the order. The Buyer acknowledges no representation or warranty (other than as to title) has been given or will apply to the Products other than those in R&G's order or confirmation and the Buyer confirms it has chosen the Products as being of merchantable quality and suitable for its particular purposes. Where R&G fits the Products or undertakes other services it shall exercise reasonable skill and care and rectify any fault free of charge unless the workmanship has been disturbed. The Buyer is responsible for ensuring that the warranty on the motorcycle is not affected by the fitting of the Products. On return of any defective Products R&G shall at its option either supply a replacement or refund the purchase money but shall not be liable if the Products have been modified or used or maintained otherwise than in accordance with R&G's or manufacturer's instructions and good engineering practice or if the defect arises from accident or neglect. Other than identified above and subject to R&G not limiting its liability for causing death and personal injury, it shall not be liable for indirect or consequential loss and otherwise its liability shall be limited to the amounts paid by the Buyer for the Products or the fitting or service concerned. These terms do not affect the Buyer's statutory rights.

R&G Racing

Unit 1, Shelley's Lane, East Worldham, Alton, Hampshire, GU34 3AQ Tel: +44 (0)1420 89007 Fax: +44 (0)1420 87301 <u>www.rg-racing.com</u> Email: <u>info@rg-racing.com</u>