



Fender Light Mount

BMW R1300GS
LAH.07.11800

Thank you for choosing DENALI

We know you would rather be riding your bike than wrenching on it, so we go the extra mile to make sure our instructions are clear and as easy to understand as possible. If you have any questions, comments, or suggestions don't hesitate to give our gear experts a call at 401.360.2550 or visit WWW.DENALIELECTRONICS.COM

Please Read Before Installing

DENALI products should always be installed by a qualified motorcycle technician. If you are unsure of your ability to properly install a product, please have the product installed by your local motorcycle dealer. DENALI takes no responsibility for damages caused by improper installation. **Caution:** When installing electronics it is extremely important to pay close attention to how wires are routed, especially when mounting products to the front fender, front forks, or fairing of your motorcycle. Always be sure to turn the handlebars fully left, fully right, and fully compress the suspension to ensure the wires will not bind and have enough slack for your motorcycle to operate properly.


Installation Tips

We strongly recommend using medium strength liquid thread locker on all screws, nuts, and bolts. It is also important to ensure that all hardware is tightened to the proper torque specifications as listed in your owner's manual. For included accessory hardware please refer to the default torque specifications provided below. Inspect all hardware after the first 30 miles to ensure proper torque specifications are maintained.


Bolt Size	in-lbs	ft-lbs	Nm
M3	10.0 in-lbs	-	1.0 Nm
M4	23.0 in-lbs	-	2.5 Nm
M5	44.5 in-lbs	3.5 ft-lbs	5.0 Nm
M6	78.0 in-lbs	6.5 ft-lbs	9.0 Nm
M8	-	13.5 ft-lbs	18.0 Nm
M10	-	30.0 ft-lbs	41.0 Nm
M12	-	52.0 ft-lbs	71.0 Nm

Hardware Sizing Guide

Not sure what size bolt you have? Use this ruler to measure screws, bolts, spacers, etc. Remember, the length of a screw or bolt is measured from the start of the "mounting surface" to the end of the screw, so only include the screw head when measuring countersunk screws.



What's In The Box?

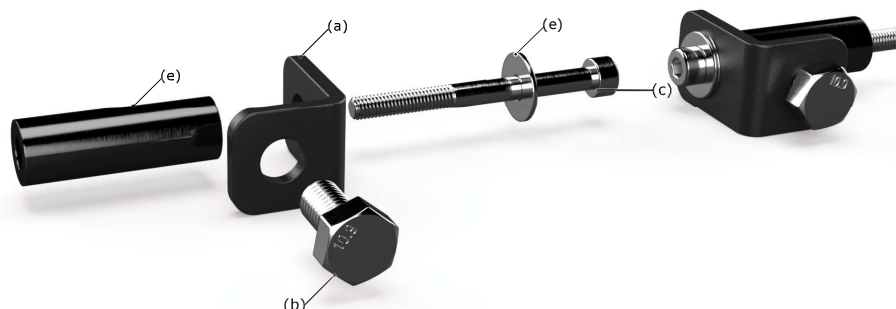

Kit Contents


- (a) Fender Mount Bracket (HMT,07007).....Qty 2
- (b) M8x16mm Mounting Bolt.....Qty 2
- (c) M5x55mm Fork Mounting Bolt.....Qty 2
- (d) M6 Spacer.....Qty 2
- (e) M5 Wahser.....Qty 2

Tools Required:

- (a) Allen Key Set
- (b) Torx Bit set
- (c) 13mm Wrench


1. Installing The Light Mount

DENALIELECTRONICS.COM

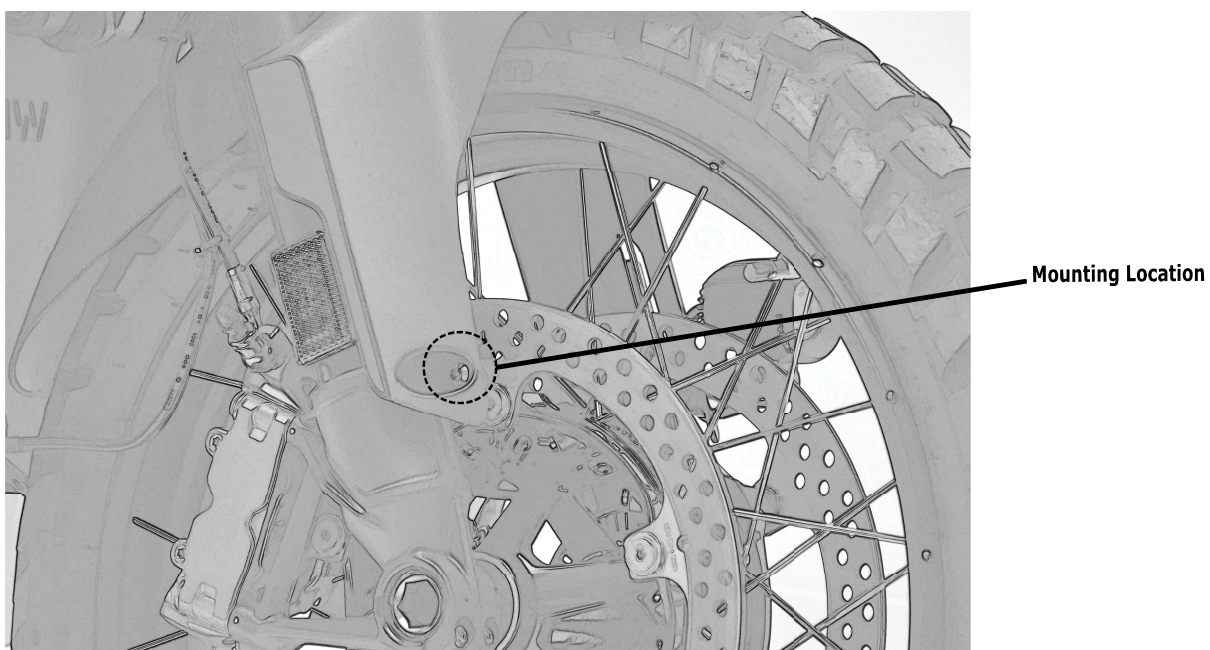

1.1 - Mounting Location

Step One: Remove the two Lower M5, T25 Torx screws that hold the lower fender to the fork.

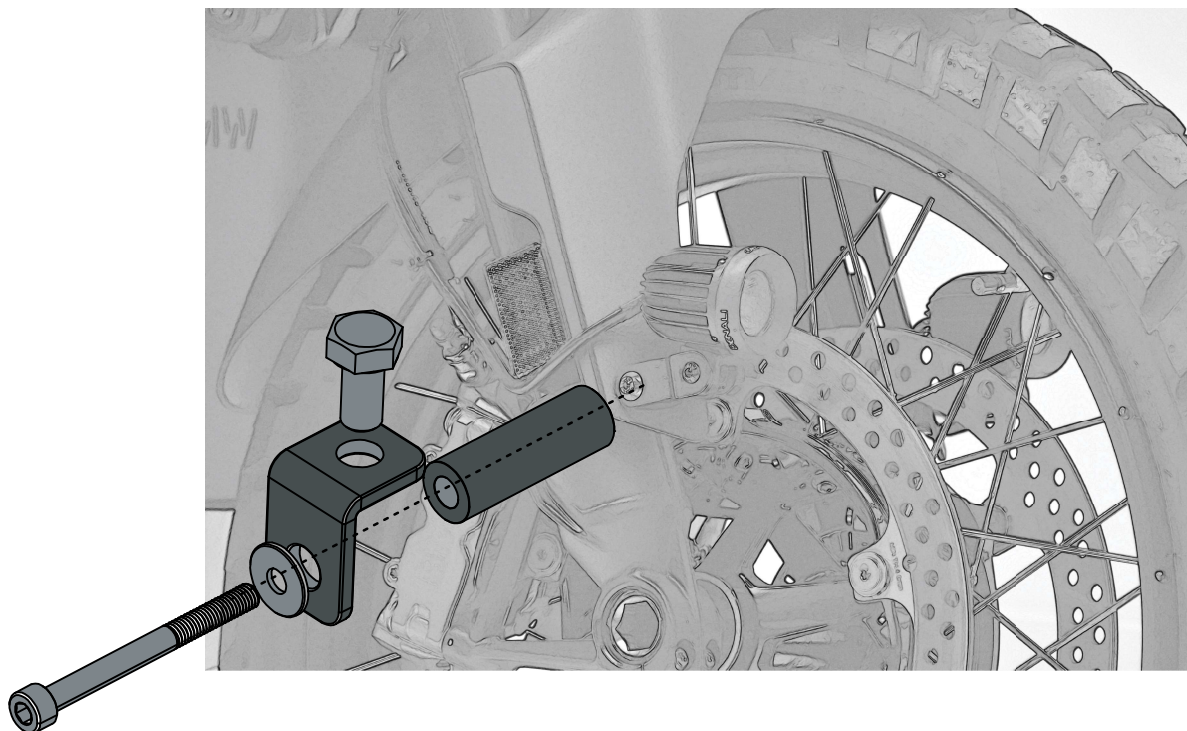

1.2 - Assembling the Bracket

Step Two: Using the Supplied M8 X 16mm bolt, mount your light to the Fender mounting Bracket.

1.3 - Mounting the Bracket and Light

Step Three: Mount the Light and the bracket to the lower fender using the supplied M5 X 55mm and M8 x 16mm Hardware and Spacer as shown.