

Denali Light Mount

BMW K1600GT '10-'14 BMW K1600GTL '10-'14

LAH.07.10200 Instructions Rev:00

PLEASE READ BEFORE INSTALLING

TWISTED THROTTLE products should be installed by a qualified, experienced motorcycle technician. If you are unsure of your ability to properly install a product, please have the product installed by your local motorcycle dealer. TWISTED THROTTLE takes no responsibility for damages caused by improper installation.

All screws, bolts, and nuts, including all replacement hardware provided by TWISTED THROTTLE should be tightened to the torque specified in the OEM maintenance manual for your motorcycle. If no torque specifications are provided in the OEM maintenance manual, the following torques may be used:

M5	3.5 ft-lbs (5 Nm)
M6	7 ft-lbs (9.6 Nm)
M8	7 ft-lbs (9.6 Nm) 13 ft-lbs (18 Nm)


All screws, bolts, and nuts should be checked after driving the first 30 miles (50 km) to ensure that all are tightened to the proper torque.


Medium strength liquid thread-locker (i.e., "Locktite") should be used to secure all screws, bolts, and nuts.

Distributed by:	buted by:	
Twisted Throttle LLC	phone: 401.284.4200	
570 Noose Neck Rd	fax: 401.223.6955	
Exeter, RI 02822	www.twistedthrottle.com	



Installation Instructions

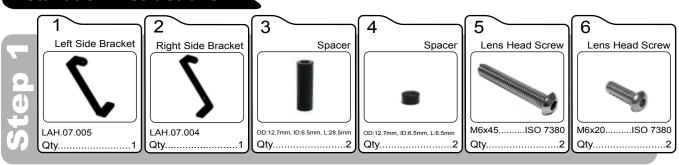

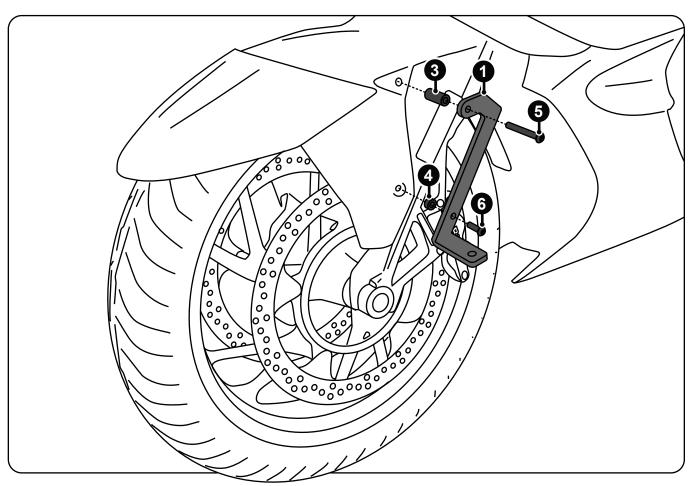

Step One: Remove the original fender bolts from the left hand side of the motorcycle. Next bolt the left hand side bracket in place using the supplied spacers and M6 hardware then torque each bolt to 7 ft-lbs.

Step Two: Repeat the steps listed above on the right hand side of the motorcycle.